

**E157X, E257X GRAVITY-FED FROZEN BEVERAGE DISPENSERS**

**E157X**
**E257X**

**ITEMS**

- ☐ **E157X-302A** Air-cooled, single-phase, countertop
- ☐ **E257X-302A** Air-cooled, single-phase, floor model

**ACCESSORIES & OPTIONS**

- ☐ **332003** Cup Dispensers - Set of 2.  
Holds 6 to 14 oz. cups.
- ☐ **332004** Cup Dispensers - Set of 2.  
Holds 12 to 24 oz. cups.

**FEATURES**

- Fully automatic controls provide a uniform product.
- Bottle racks with plastic bottles and pumps are included.
- Simplified design for quick assembly after cleaning.
- Vertically oriented freezing cylinder provides high capacity and maximum energy efficiency.

**DESCRIPTION**

Compact counter-top model and floor model gravity-fed frozen beverage dispensers feature a large 10-gallon (37.9-liter) capacity for high-volume dispensing. These freezers are designed to operate with most neutral bases and concentrated flavors. Ideal for convenience stores, schools, delis, restaurants, cafeterias, and recreational facilities.

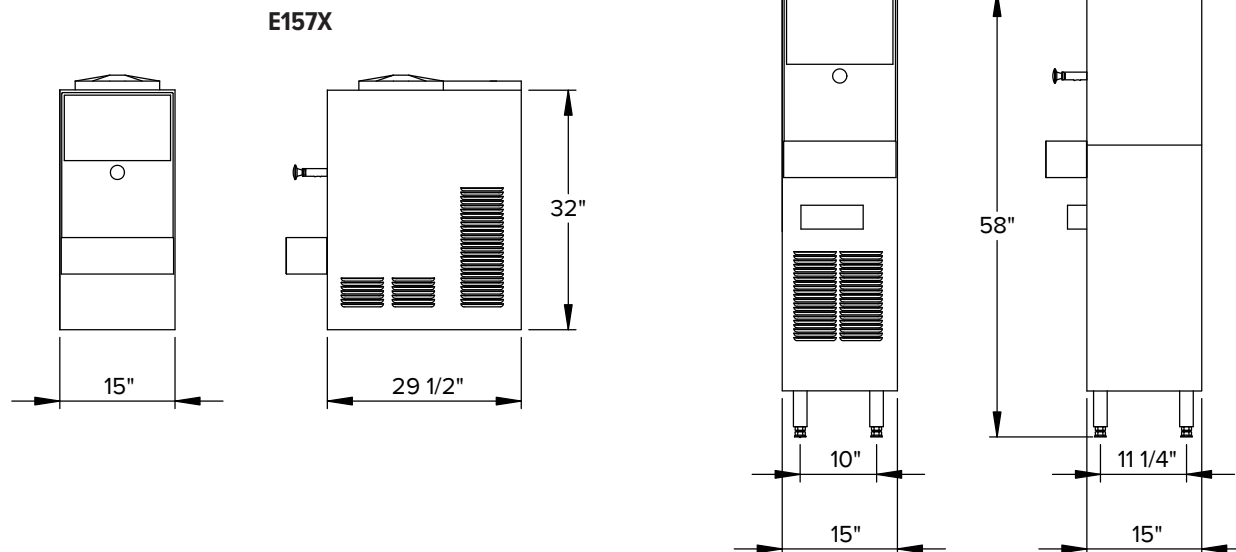


Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

*Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.*

**Approvals**
**Date**

--	--

**E157X, E257X GRAVITY-FED FROZEN BEVERAGE DISPENSERS****DIMENSIONS****GENERAL SPECIFICATIONS**

Model	Freezing Cylinder Compressor			Hopper Capacity gallon (L)	Drive Motor (hp)	Weight lb (kg)	Crated Weight lb (kg)
	Btu/hr	Refrigerant	Charge (oz)				
E157X	2,600	R-448A	16	10 (37.85)	1/12	142 (64.4)	200 (90.7)
E257X	2,600	R-448A	16	10 (37.85)	1/12	140 (63.5)	185 (83.9)

- Indoor use only.
- Maximum ambient temperature: 100°F (37.8°C).
- Requires a dedicated electrical circuit.
- Details on CAD Revit Symbols Libraries are available on [www.stoelting.kclcad.com](http://www.stoelting.kclcad.com) website.
- Air cooled units require the following:
  - E157A units require 3" (7.6 cm) air space on both sides and 1" (2.5 cm) at the back.
  - E257A units require 6" (15.2 cm) air space at the back and below.

**ITEM NUMBER SPECIFICATIONS**

Model Number	Cooling	Phase	Volts	Hz	Running Amps	Cord with Plug (Included)
E157X-302A	Air	1	220-240	50	5	NA
E257X-302A	Air	1	220-240	50	5	NA



**Service Information**  
 800-319-9549 (U.S. Toll Free)  
 920-894-2293 (Outside the U.S.)  
[www.stoeltingfoodservice.com](http://www.stoeltingfoodservice.com)  
[www.vollrath.com](http://www.vollrath.com)