

**E112X, F112X SHAKE OR SLUSH COUNTERTOP FREEZER**

**E112X**

**F112X**

**DESCRIPTION**

Single-flavor, gravity shake or slush freezer, compact counter-top model, offers the convenience to serve frozen beverages, shakes, smoothies, or frozen cocktails with one machine.

**FEATURES**

- Compact, space-saver unit, offers the convenience to serve frozen beverages, shakes, smoothies, or frozen cocktails.
- One selector switch, auto-off-clean, for simplified operation and cleaning.
- Low mix warning light with electronic controls are auto-fill ready.
- Stainless steel auger, heavy-duty speed reducer, 1/3 and 3/4 hp drive motors for long life dependability.
- Stator bar agitates frozen beverage mixes with a wide range of sugar content (Brix measurement).
- Filtered bottom air inlet permits side-by-side installation with 4 in (10.2 cm) of back air clearance.
- One piece clear polycarbonate door highlights pre-flavored products.
- Electric, CO2 or air operated autofill kits available.
- On demand defrost insures a smooth drink with consistent quality.

**ITEMS**

- E112X-302** Air-Cooled, Single-Phase
- F112X-102** Water-Cooled, Single-Phase
- F112X-302** Air-Cooled, Single-Phase

**ACCESSORIES & OPTIONS**

- FS2** Floor Stand 22" x 24" x 31".
- FSS2** Floor Stand 22" x 24" x 26".
- FS4** Floor Stand 24-1/4" x 22-1/4" x 18-3/4".
- 2183807** Autofill Ready Kit - Includes hopper cover, tubing, and solenoid. Requires autofill system.
- 2187905** Autofill System - E112X - Includes pump, regulator, valves, tubing, BIB connector.
- 2203249** Autofill System - F112X - Includes pump, regulator, valves, tubing, BIB connector, BIB shelf.
- 2187040** Bottle Rack Kit - Includes 7 Plastic Bottles and Pumps.
- 2187031** Side Mounted Spinner Kit - F112X (kit must be installed by a qualified service technician).
- 2208239** Side Mounted Spinner Kit - E112X (kit must be installed by a qualified service technician).
- 521030** Standalone Mix In Blender with Foot Switch, 200-240V.
- 521035** Standalone Mix In Blender with Mounted Speed Control, 200-240V.


 Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

*Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.*


**Approvals**
**Date**

## E112, F112 SHAKE OR SLUSH COUNTERTOP FREEZER

### DIMENSIONS

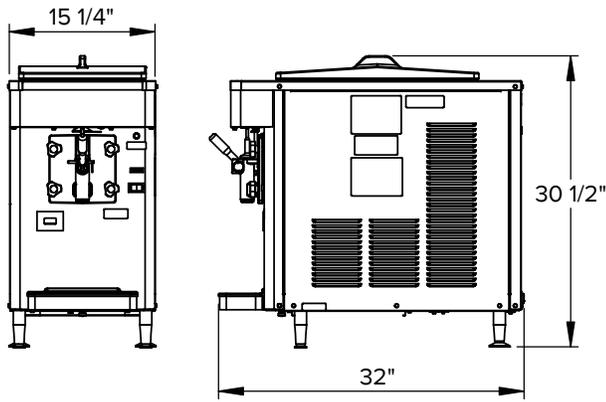

E112X

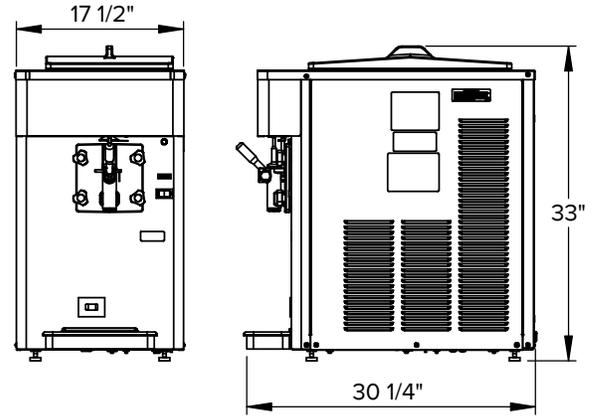

F112X

### GENERAL SPECIFICATIONS

Model	Freezing Cylinder				Hopper Capacity gallon (L)	Drive Motor (hp)	Weight lb (kg)	Crated Weight lb (kg)
	Capacity gallon (L)	Compressor						
		Btu/hr	Refrigerant	Charge (oz)				
E112X-302	1.25 (4.7)	4,500	R-448A	20	3.63 (13.7)	1/3	205 (93)	220 (99.8)
F112X-102	2.12 (8.0)	8,000	R-448A	17	5.38 (20.4)	3/4	288 (130.6)	278 (126.1)
F112X-302	2.12 (8.0)	8,000	R-448A	24	5.38 (20.4)	3/4	288 (130.6)	278 (126.1)

- Indoor use only.
- Maximum ambient temperature: 100°F (37.8°C).
- Requires a dedicated electrical circuit.
- E112X air cooled units require: 3" (7.6 cm) air space on both sides or 4" (10.2 cm) air space in back for side-by-side installation.
- F112X air cooled units require: Units require 6" (15.24 cm) air space on both sides.
- F112X water cooled units require: 3/8" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM per barrel. Ideal EWT of 50°-70°F.
- Details on CAD Revit Symbols Libraries are available on [www.stoelting.klccad.com](http://www.stoelting.klccad.com) website.

### ITEM NUMBER SPECIFICATIONS

Model Number	Cooling	Phase	Volts	Hz	Running Amps	Cord with Plug (Included)	Spinner
E112X-302	Air	1	220-240	50	10	NA	—
F112X-102	Water	1	220-240	50	9	NA	—
F112X-302	Air	1	220-240	50	10	NA	—



**Service Information**  
 800-319-9549 (U.S. Toll Free)  
 920-894-2293 (Outside the U.S.)  
[www.stoeltingfoodservice.com](http://www.stoeltingfoodservice.com)  
[www.vollrath.com](http://www.vollrath.com)